




: 5 . % -

23- 129

8OWUDVRIW 5HFRYHU\ %ULGJH



3, 11, 1*

3, 1	'(6&5,37,21
	, Q SX V A A Q
	, Q SX V A A Q
	2XWSXW \$ Q A R G H
	2XWSXW & A W K R G H

) HDWXUHV
 ‡*ODV D VVLY D W L S G F W L R Q
 ‡5HYH U R I W D J H 9
 ‡)RUZ D X G U H Q W
 ‡+LJ X U & X U U & H Q W E L O L W \
 ‡'HVLJ Q R G X U I D R X \$ S S O L F D W L R Q
 %HQHILWV
 ‡&DVH%-
 ‡7HUPL G R O G H P D E O H 6 7'

0D[LPXP DWL Q Q G O H F W E K B D O F W H U L V W L F V

5DWL Q W V & D P E L M Q W S H U Q Q X U M K H U Z S H F L I L H G
 6LQJ O H S K D V H K Q U I H Z D V M U Q G X F O R D V H E D S D F L W E X H U Q R O W H

3DUDPHWHU	6\PEROV	: 5 . % -	8QLWV
0D[LPXP 5HSHWLWLYH 3HDN 5H5DU VH 9ROWDJH	9506		9
0D[LPXP 506 YROWDJH	9506		9
0D[LPXP '& %ORFNLQJ 9ROWDJH &			9
\$YHUDJH 5HFWLILHG 2XWSXW &XUUHQW			\$
5HYHUVH 5HFRYHU\ 7LPH ,) \$,5 \$,55 \$	7UU		XV
3HDN)RUZDUG 6XUJH &XUUHQW PV 6LQJOH +DOI 6LQH :DYH 6XSHULPSRV, H G R Q 5DWHG /RDG -('(& 0HWKRG			\$
, WUDW E O X V L Q B V W P V	, W		\$ 6
0D[LPX)RUZ D U R G W D W H \$	9)		9
0D[LPXP '& 5HYHUVH &XUUHQW #7\$ f & DW 5DWHG '& %ORFNLQJ 9ROWDJH #7\$ f &			\$
7\SLFDO -XQFWLR Q & R V S D F L W D Q & M H			S)
2SHUDWLQJ DQG 6WRUDJH 7H P S T W D W X U H 5DQJ H a			f &
1RWH0HDVX D M G +] D Q G S S O L H Y G H Y U R Q V R D J H & 0RXQWHG RQ JODVV HSR\ \ 3 & E'R(DUG< ZLWKP) FRSSHU SDG			


: 5 . % - 5HY

:RUOG , QWH & Q L D M L F L O W D O G


: 5 . % -

23-129


5 \$ 7 , 1 * 6 \$ 1 ' & + \$ 5 \$ & 7 (5 , 6 7 , & 6 & 7 5 9 (6 X Q O H V V R W K H U Z L V H Q R W H G

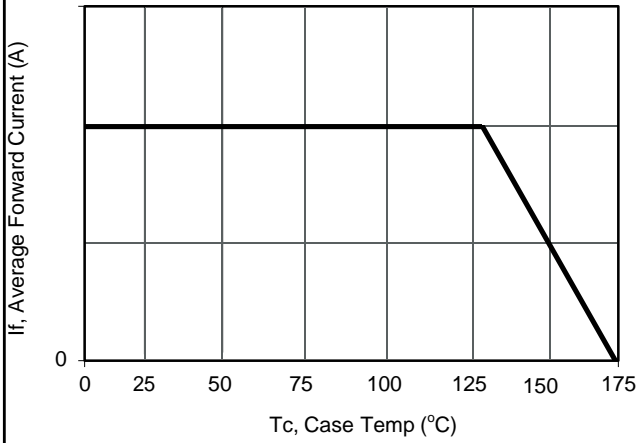


Current Derating Case

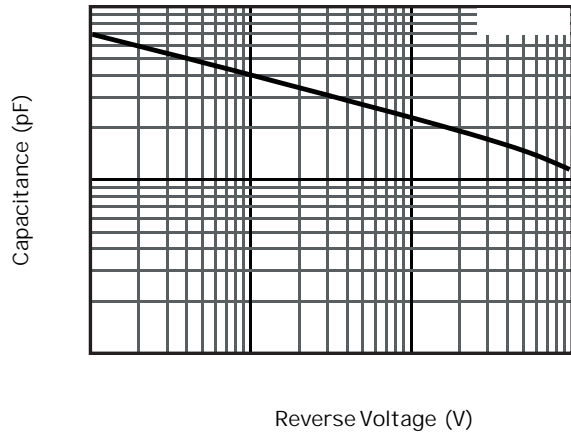

Typical Junction Capacitance

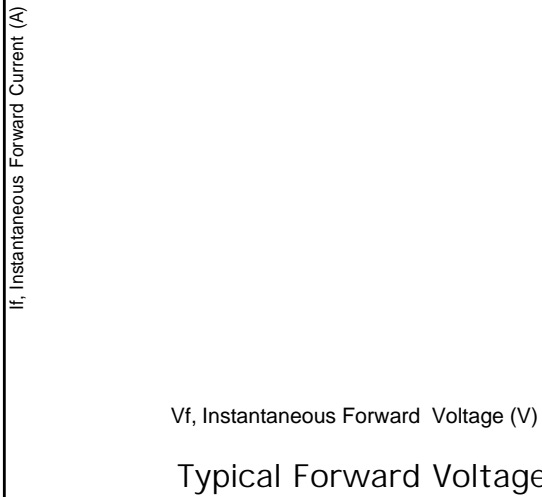

Typical Forward Voltage

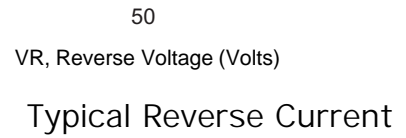

Typical Reverse Current



: 5 . % -

23- 1 2 9

KBJ

