



WRD3K410




		WR	

× "x " (×)


WRD3K410

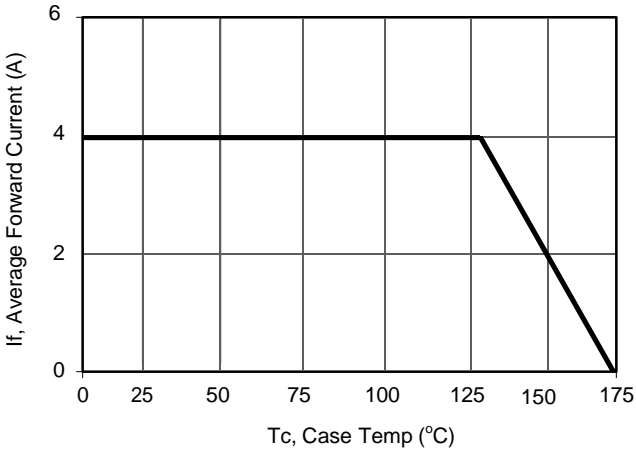

Current Derating, Case

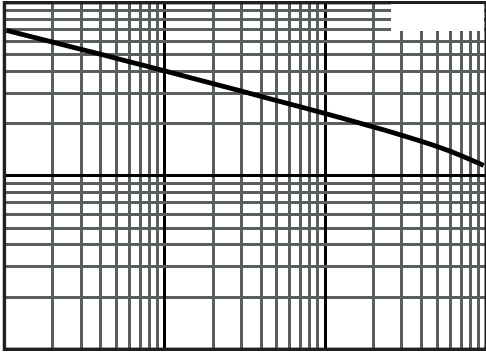

Typical Junction Capacitance

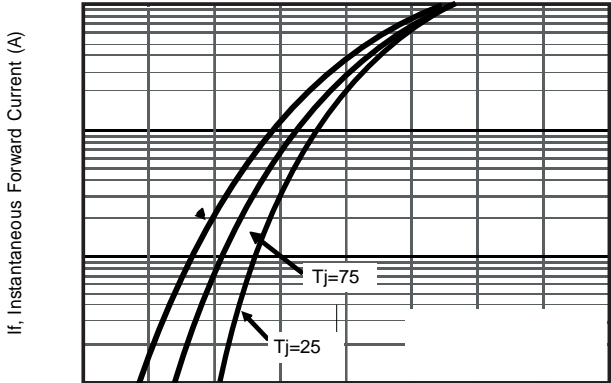


Vf, Instantaneous Forward Voltage (V)

Typical Forward Voltage

50
VR, Reverse Voltage (Volts)

Typical Reverse Current

WRD3K410

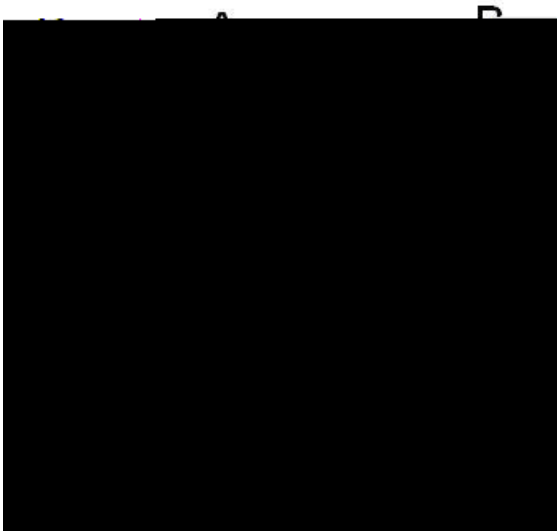

D3K		
Dim.	Min.	Max.
A	14.2	14.7
B	3.30	3.60
C	10.2	10.6
D	13.8	14.4
E	1.8	2.2
F	6.65	7.25
G	3.71	3.91
H	0.3	0.55
I	1.22	1.42
J	0.76	0.86
O	1.8	2.4
P	3.0Φ	3.4Φ

All Dimensions in millimeter

