



76\$6

129

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA 6



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &R#6OLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYHYURQW DJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUUHQW VLQDQHLQZDYH VXSHULP&QNDVGRS&GLRGH		,) 60	5	\$
2SHUDMXQ&DQGRWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFNDKUPDO USHVULVQHDQFH '2 \$'		5\$-&		f & :
,QVWDQWDQHRRQWRWUJZDUG SHGLRGH	,) \$	7- f&	7 < 3	0\$;
	,) \$	7- f&		
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHOMRQW UDWHYHYURQW DJH	7- f&	,5		X\$
	7- f&			P\$

1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0




RATINGS AND CHARACTERISTICS CURVES

7\$


f & XQOHVQRWKBUZLVH

, I \$ Y H U D R W Z D U X G U U \$ Q W

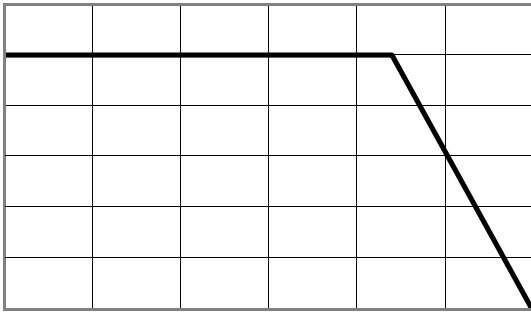

7 F & DVHP \$&


3 HD NR U Z D U X G U U \$ Q W

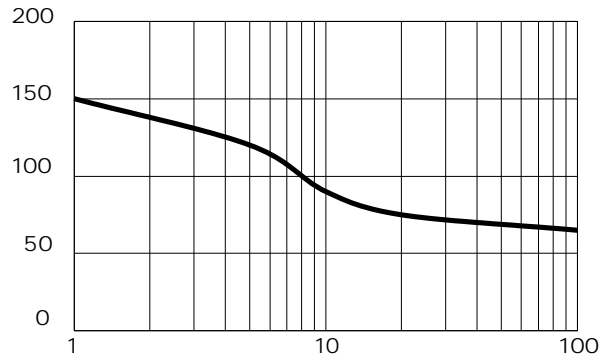

Maximum Repetitive Surge Current


, I , Q V W D Q W R Q W Z R X X G U U \$ Q W

Current Derating, Case

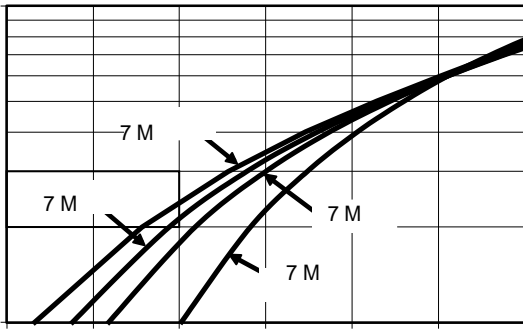

91 , Q V W D Q W D Q H R R O W) R L J Z D R U G


, U 5 H Y H & X H U U H X \$ W

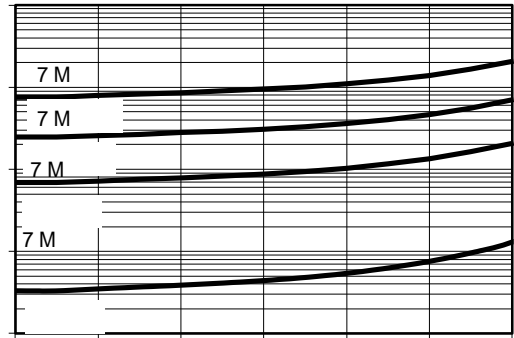

Typical Reverse Current

& D S D F L W S D Q F H

Typical Forward Voltage

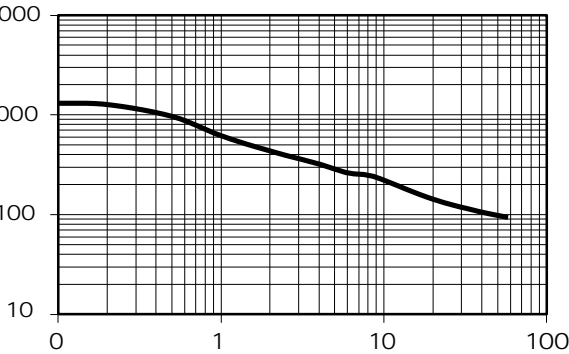


5 H Y H U V H 9 R O W D J H 9

Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS

DO-201AD

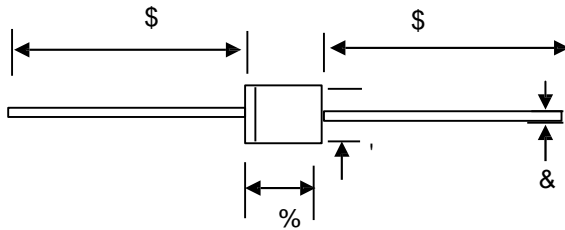


'2 \$' PHFKD QLFWD

81,7		\$	%	C	'
PP	PD[1.4	
	PLQ			1.1	
PLO	PD[5.1	
	PLQ				

0DUNLQJ ,QIRUPDWLRQ


Cathode



Anode

7 3URGXFW: 76\$6HO


8 3' & LQIRUPDWLRQ

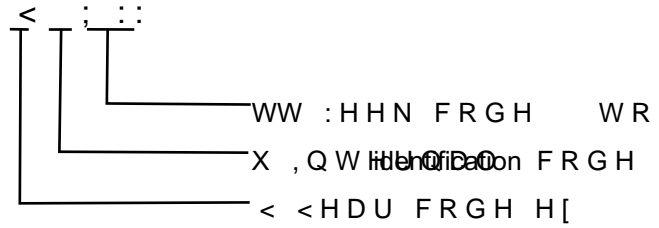

DWU] b['=bZcf aUh] cb

% =bg] XY 6cl

&' G hg] XY 6cl

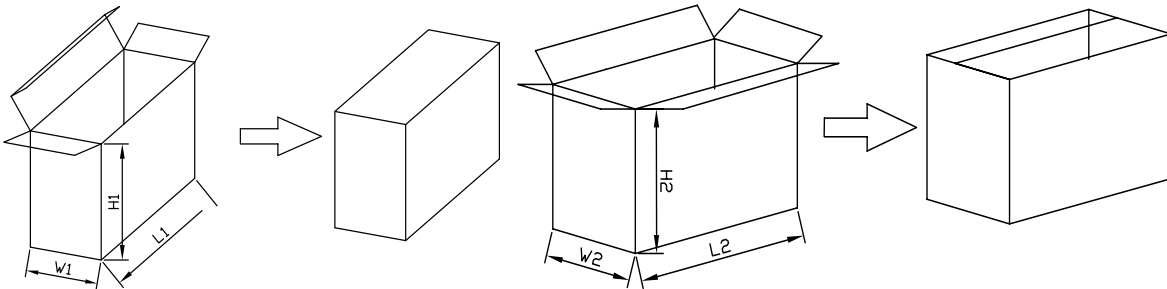

DWU] b['=bZcf aUh] cb

BC	IB-H	% =bg] XY 6cl			&' G hg] XY 6cl		
G] nY	aa	@%	K%	<%	@&	K&	<&
		&)	+)	%4	4		