




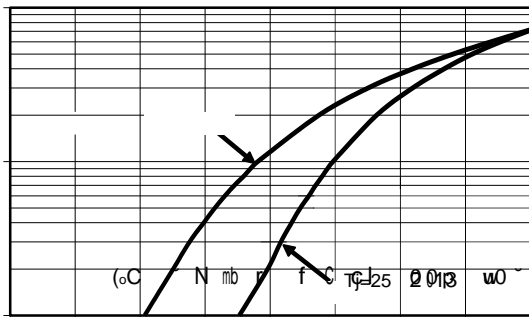


RATINGS AND CHARACTERISTICS CURVES (TA = 25

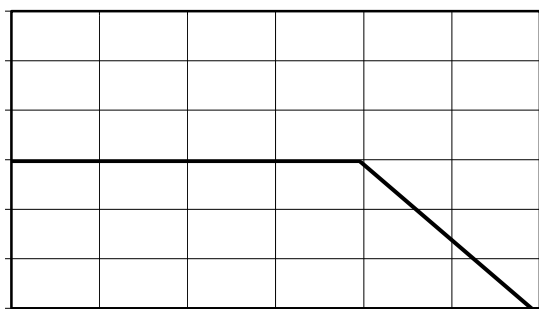

**PACKAGE OUTLINE DIMENSIONS**


**DO-201AD**

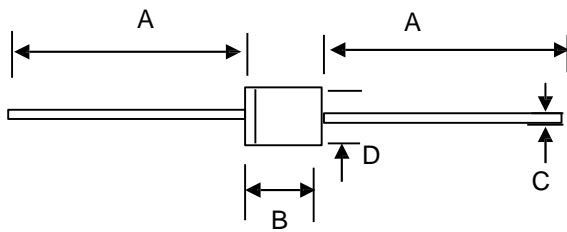

DO-201AD mechanical data

UNIT		A	B	C	D
mm	P D [	26.5	9.5	1.4	5.3
	P L Q	24.5	7.3	1.1	
P L O	P D [	1043.30	374.01	55.12	208.67
	P L Q	946.57	287.40	39.37	188.97

Cathode




Anode

Product model : TSA3L40

PDC information


Y X WW

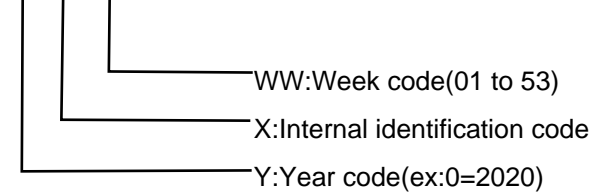

1. In

2.0 t

s

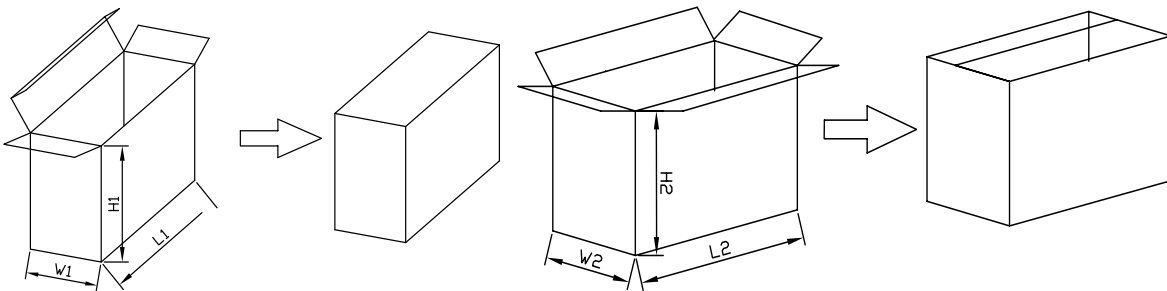

NO	UNIT	Inside Box			Outside Box		
		L1	W1	H1	L2	W2	H2
Size	mm	255	75	145	415	280	320
QTY	PCS	Smallest package,100 0PCS/ car t on			10,000PCS/carton, 10 boxes in total		
Note	Tolerance	20mm,±3mm; 21-100mm,±5mm;		101-500mm,±10mm			