

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA 3



Cathode  Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZDURGDWDJH GURS
- ‡ /RZRZDURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK \$RPSOLDQW

Applications




- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZDSSOLHV
- ‡)UHHZKH'HLRGH

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

3DUDPHWHU			6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH			9550		9
0D[LPHYHURJHZDUG UFKWHLQWG			,) \$9		\$
3HDN IRVZDURUHQW VLQDQHZDYH VXSHULPSHQHVRSHGLRGH			,) 60		\$
2SHUDMXQDQWRUDJH WHPSHUDW			X0H76D°CJH	WR	f &
7\SLFQCHUPDO USHVUVDQFH		'2 \$'	5\$-&		f & :
,QVWDQWDQHRXVUHQWZDUG SHGLRGH			9)	7<3	0\$;
	,) \$	7- f&			
	,) \$	7- f&			
	,) \$	7- f&			
	,) \$	7- f&			
,QVWDQWDQHRXVUHQWZDUG		7- f&	,5		X\$
UDWHYHYURQWDJH		7- f&			P\$


1RWHV
3XOVH WHVVSXOVH ZLGWK GXW\F\FOH
3XOVH WHVW 3XOVH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

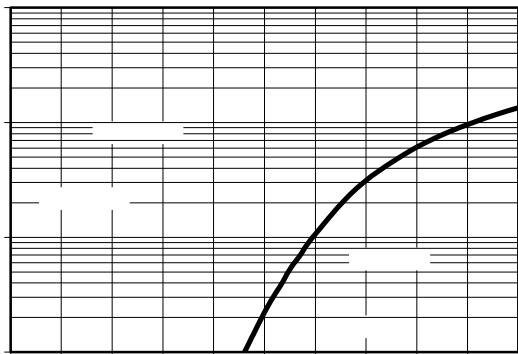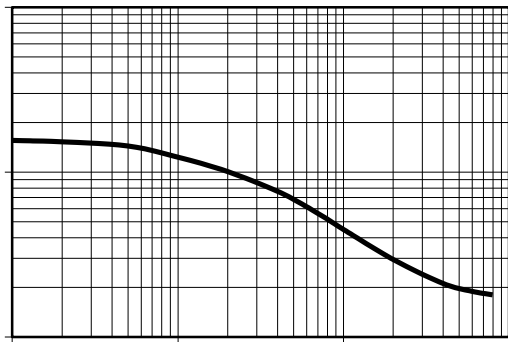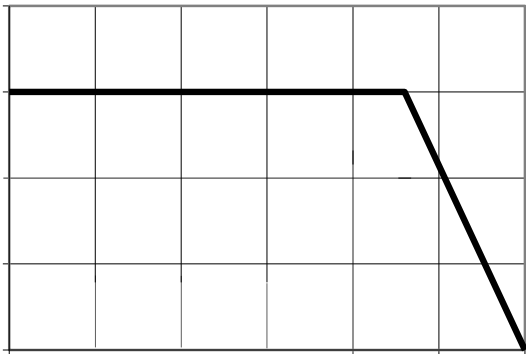

PACKAGE OUTLINE DIMENSIONS


DO-201AD

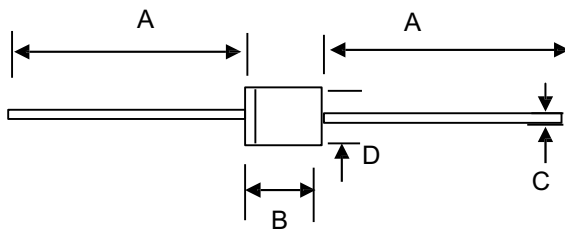

DO-201AD mechanical data

UNIT		A	B		D
mm	max	26.5	9.5	4	5.3
	min	24.5	7.3	1	4.8
mil	max	1043.30	374.01		208.67
	min	946.57	287.40		188.97

Cathode

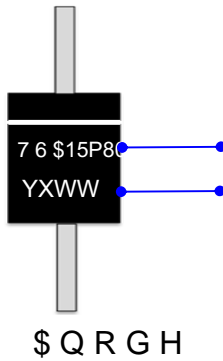

Product model : TSA15P80

PDC information


Y X WW

WW:Week code(01 to 53)


X:Internal identification code

Y:Year code(ex:0=2020)

1.Inside Box



2.Outside Box



NO	UNIT	Inside Box			Outside Box		
Size	mm	L1	W1	H1	L2	W2	H2
		255	75	14	4	280	320
QTY	PCS	Smallest package,1000PCS/carton			10,000PCS/carton,10 boxes in total		
Note	Tolerance	≤20mm,±3mm; 21-100mm,±5mm; 101-500mm,±10mm					