



76\$ 9

129

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD  
TSA 9



Cathode  Anode 

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURGRVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGHLQLVK &RPSOLDQW

Applications



- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHS SOLHV
- ‡ )UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXSHVSHUNYHYURQWDJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULPSRQDCHRSRGLRGH		,) 60		\$
2SHUDMXQEDQGRWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFVCHUPDO USHVUVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRDUG SHGLRGH	,) \$	7- f&	7 < 3	9
	,) \$	7- f&	0\$;	
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHCHRCWH UDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$


1RWHV  
3XOVH WHVVSXOVH ZLGWK GXW\F\FOH  
3XOVH WHVW 3XOPH ZLGWK 0

RATING

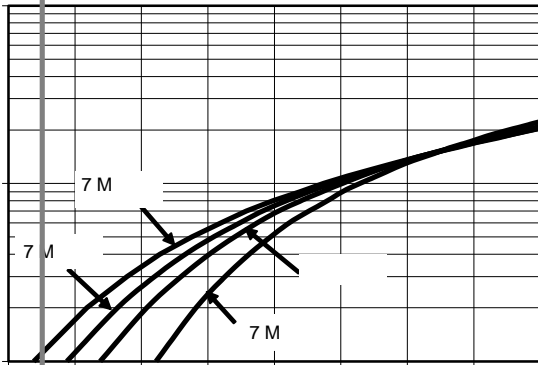


76\$

9

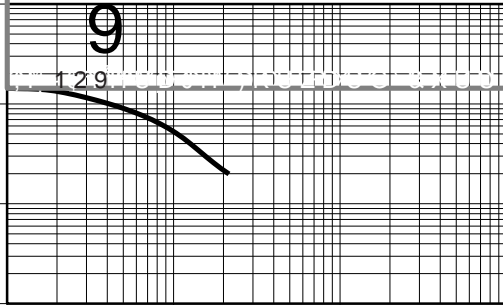

**PACKAGE OUTLINE DIMENSIONS**


**DO-201AD**

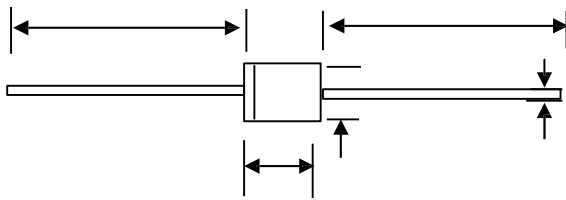


				C	
				1.4	
				1.1	
				5.1	

ODUNLQJ ,QIRUPDWLRQ

73URGXFW PQRGH  
83' & LQIRUPDWLRQ




\$QRGH

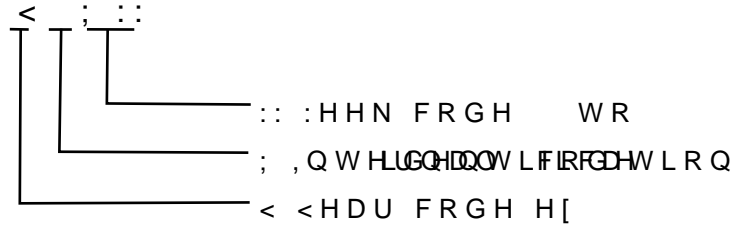

DWU ] b [ ' =bZcf aUh] cb

% =bg| XY 6cl

&' G hgl XY 6cl

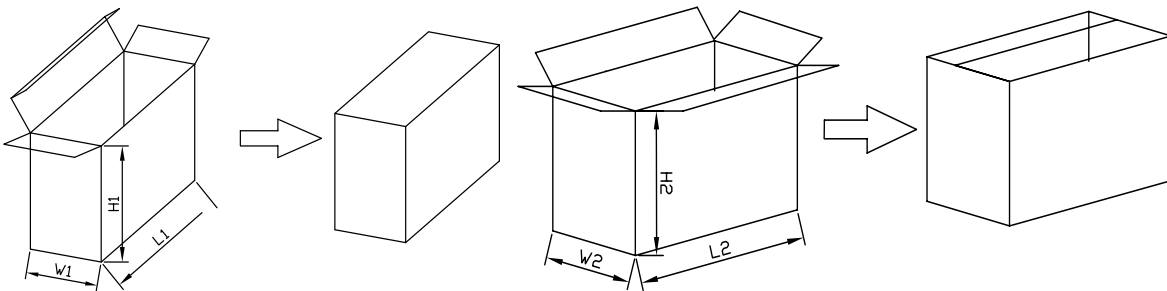

DWU ] b [ ' =bZcf aUh] cb

BC	I B=H	=bg  XY6cl			G hgl XY6cl		
G nY	aa	@%	K%	<%	@&	K&	<&
		& )	+)	%4Í	4FÍ	G €	HG€
ÛVŸ	ÚÔÙ	Ù { æ  ^ • ç } æ & \ æ * ^ É F € € € Ú Ô Ù D & æ   c [ } Á			F € € € € Ú Ô Ù D & æ   c [ } É F € à [ ç ^ • á } Á c [ ç æ ]		
P [ c ^	V [   ^ i æ } & ^	mG€ { { É t H { { L GFÉF€€ { { É t Í { { L			F€FÉÍ€€ { { É t F€ { {		