

# TS \$3L

19-NOV-201 SD 11H

7 UHQFK 026 %DUULHU 6FKRWWN\ 5H




'2  
 '2 \$&

### Features

- ‡ \$GYDQWUHQWFKKQROI
- ‡ /RZRUZDURGVGDUJS
- ‡ /RZSRZURVVHV
- ‡ +LJKIILFLRISDFU DWLRC
- ‡ /HDJUH)HLQLS/RK+ & RPSC

### Applications

- ‡ '& '&RQYH
- ‡ \$& '\$GDSW

Cathode  Anode

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)






3 D U D P H W H U		6 \ P E R	/ L P L W	8 Q L
0 D [ L P X P H S H V S H W L P Y F Y R V R W T S J g % f ( % e , , b I Q 5 & Q ... 3 ! Y F , ^ ° E F • ! a R " U • F , ^ ° E F • 9 + 0 V % 1 f r Q h 2 , ^ ° E				
0 D [ L P X P Y H U D R J U H Z D U G W F L X I U H G I Q W		, ) \$ 9		\$
		, ) 6 0		\$
2 S H U D M X Q B D V Q R U W H J P I S H U D D V Q X U H		7 - 7 6 7 *	W R	&
7 \ S L F D O ó S G U % T M g L 2 â 7 \ S L F D O ó S ... ) R Y -				
, Q V W D Q W B Q Z I R C W		9)	7 < 3	0 \$ ;
	, ) \$		7 - f &	9
	, ) \$		7 - f &	

1 R W H V

3 X O W H H V W V S X O Z I H G W K G X W \ F

3 X O W H H 3 X O Z I H G W K P V

## RATINGS AND CHARACTERISTICS CURVES

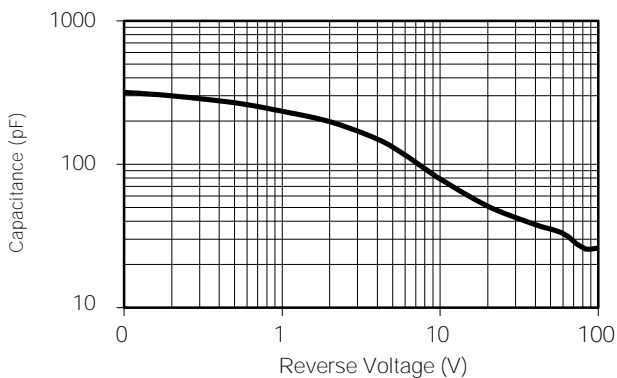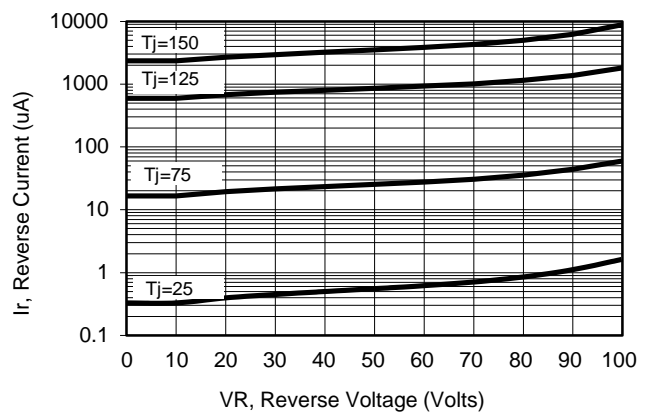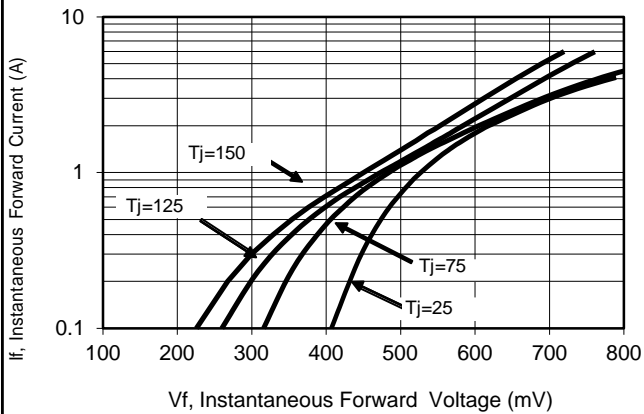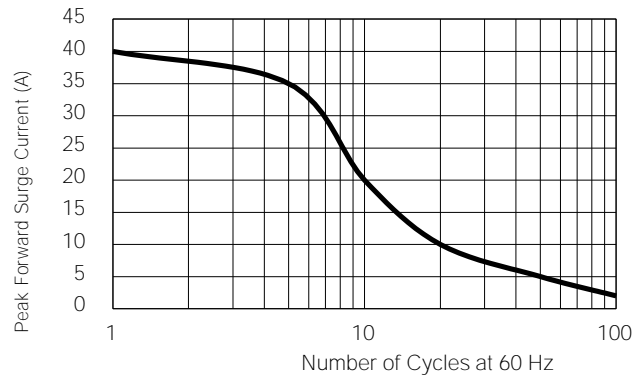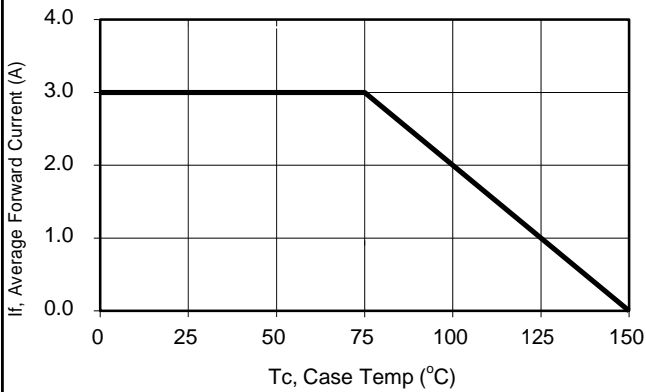

## PACKAGE OUTLINE

'2 GLPHQVLRQV

